



訊航科技股份有限公司(速買配)

Epson(TM-T70ii)印表機網路連線設定

操作教學手冊

中華民國 113 年 12 月 24 日修訂

目錄

系統操作使用說明	3
Epson(TM-T70ii)印表機設備開啟	4
EpsonNet Config 軟體下載	6
EpsonNet Config 軟體解壓縮	8
EpsonNet Config 軟體安裝	11
EpsonNet Config 密碼設定	15
Epson 印表機 IP 位址更改	18
電腦 IP 位址查詢	20
Epson 印表機連線設定	21
不休眠模式設定	28
印表機連線確認	29

系統操作使用說明


- 連線操作前請檢查網路線是否連接。
- 使用者名稱預設為：epson
- 手冊製作時以 Google Chrome 【版本 131.0.6778.205（正式版本）（64 位元）】 瀏覽器擷取操作頁面圖例，使用者若使用其他瀏覽器或其他 Google Chrome 版本瀏覽器操作時，頁面可能會與手冊圖例有所差異。

Epson(TM-T70ii)印表機設備開啟

★步驟 1. 接上電源線及網路線



★步驟 2. 按住出紙鍵並開啟電源→會印出第一段紙

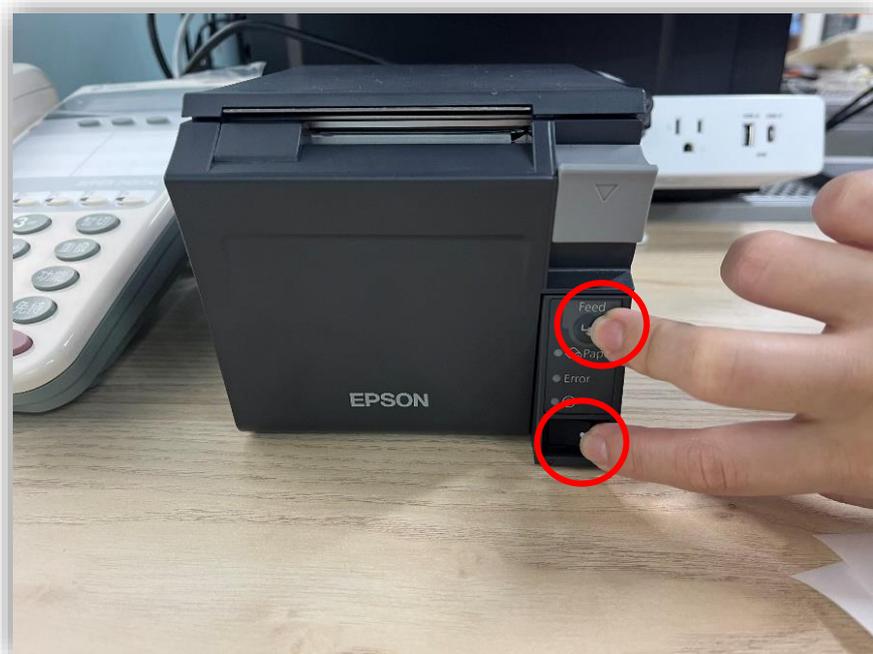

★步驟 3. 再按一次出紙鍵→會印出第二段紙




EpsonNet Config 軟體下載

★步驟 1. 由 e-pos 系統中點選設備→區域網路




★步驟 2. 點選驚嘆號圖示→依電腦類別選擇下載

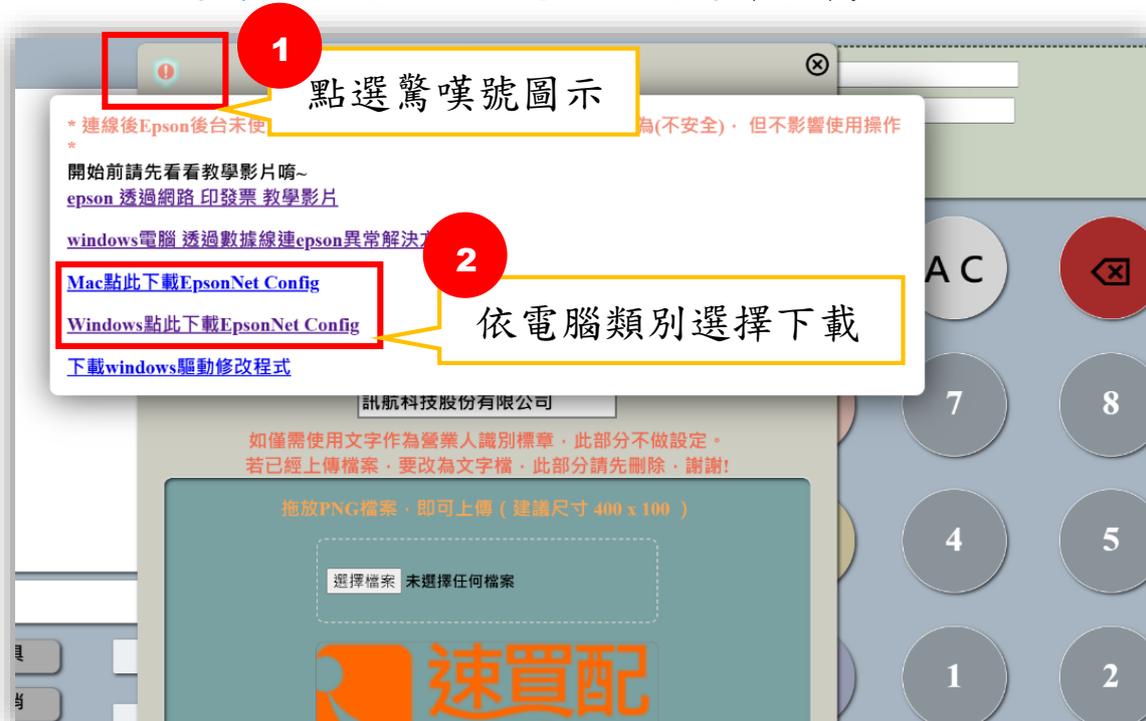


★步驟 3. 點選下載

點選下載

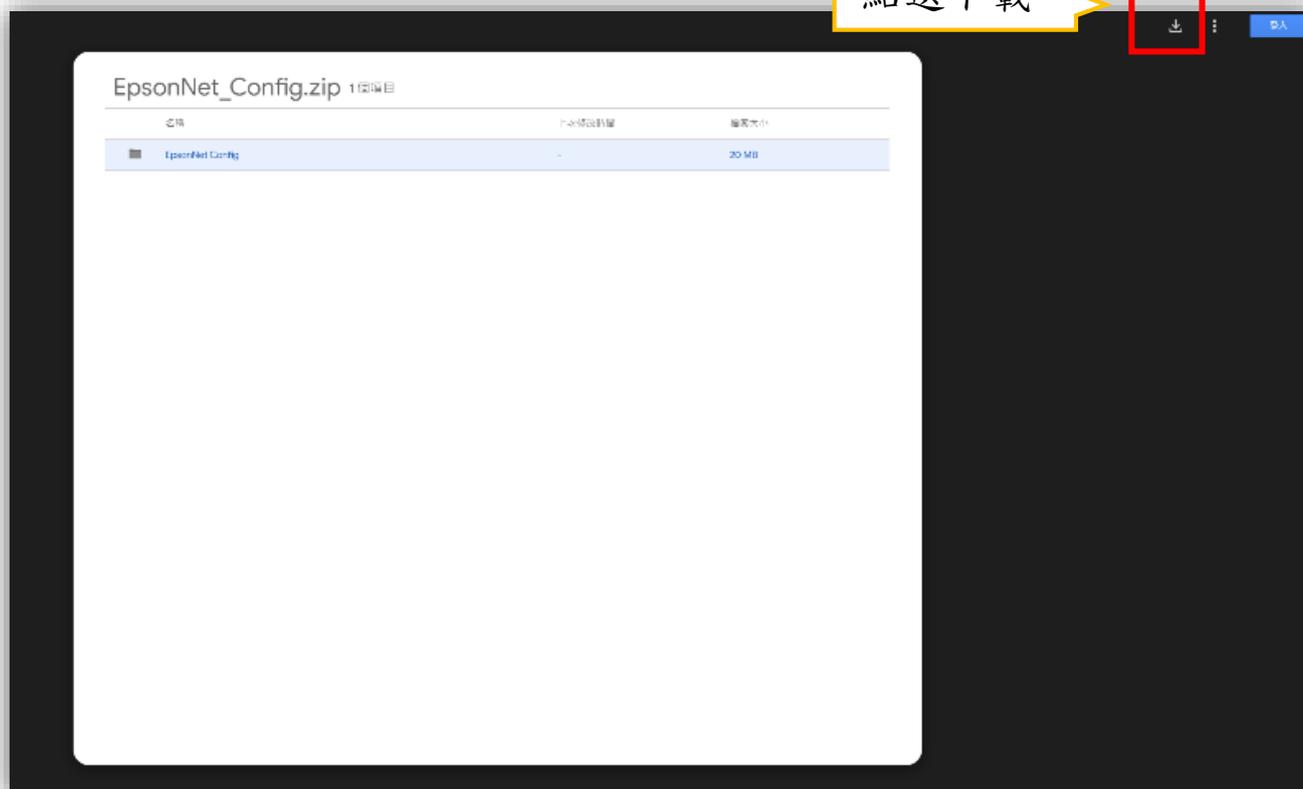


★步驟 4. 打開下載內容

雙擊資料夾

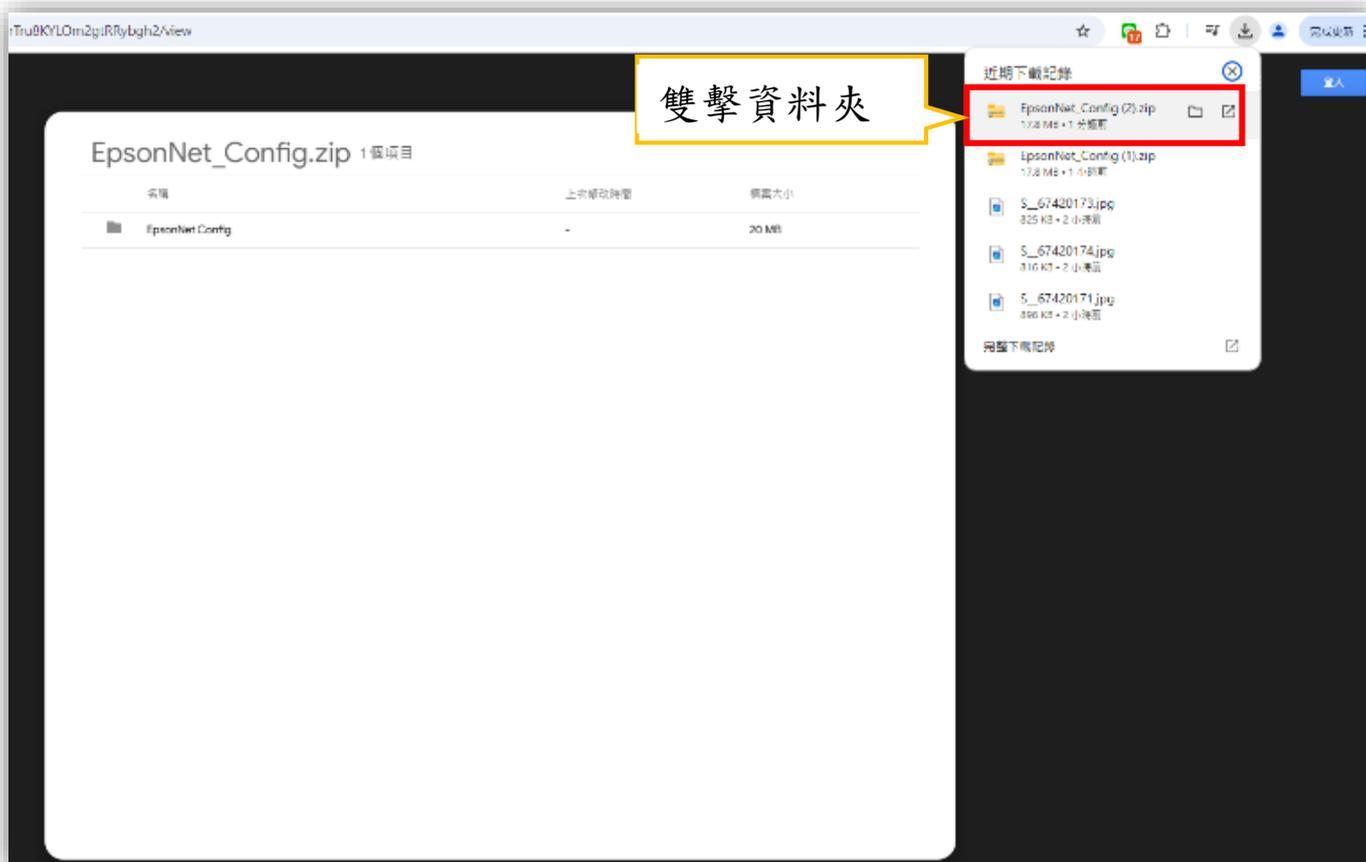


EpsonNet Config 軟體解壓縮


★步驟 1. 至 Windows 的【開始】找到 EpsonNet Config 並依序點選

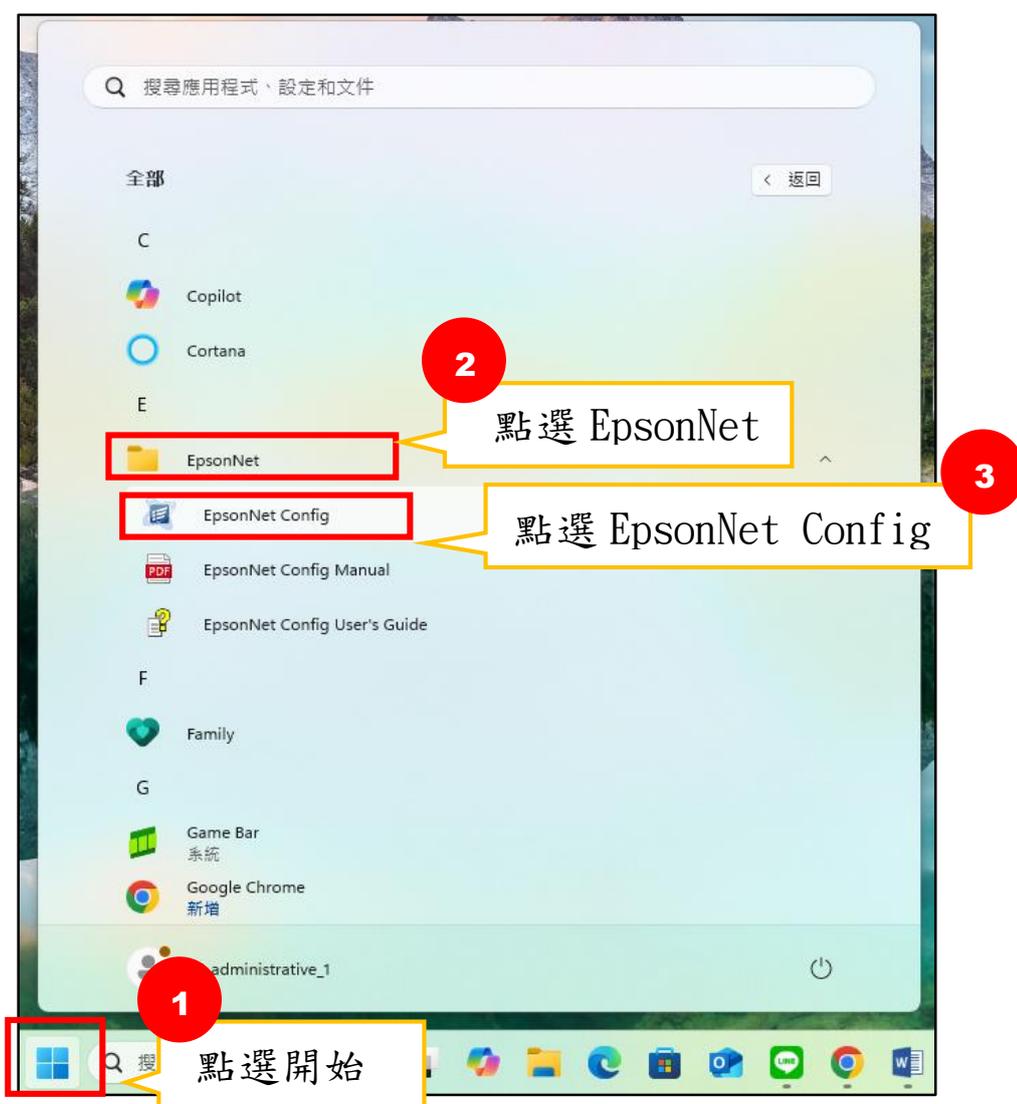


★步驟 2. 點選 EpsonNet Config

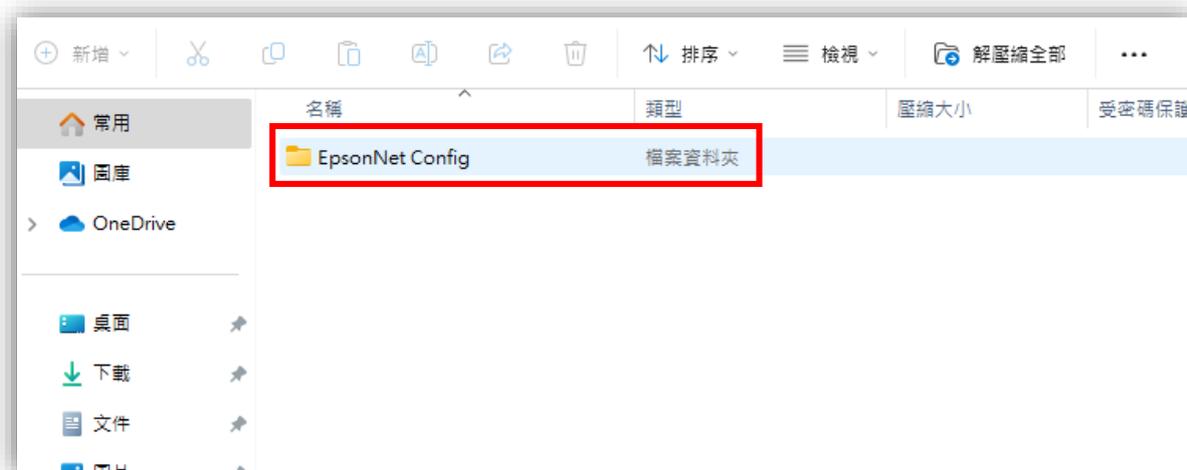


★步驟 3. 點選 setup

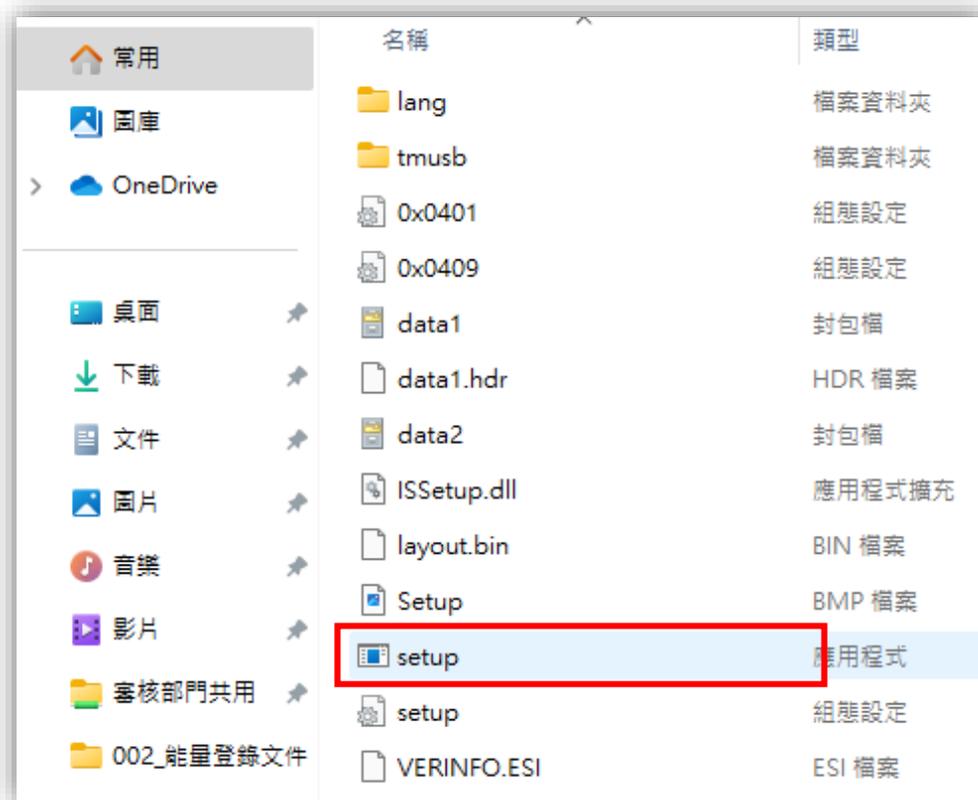

★步驟 4. 點選解壓縮全部

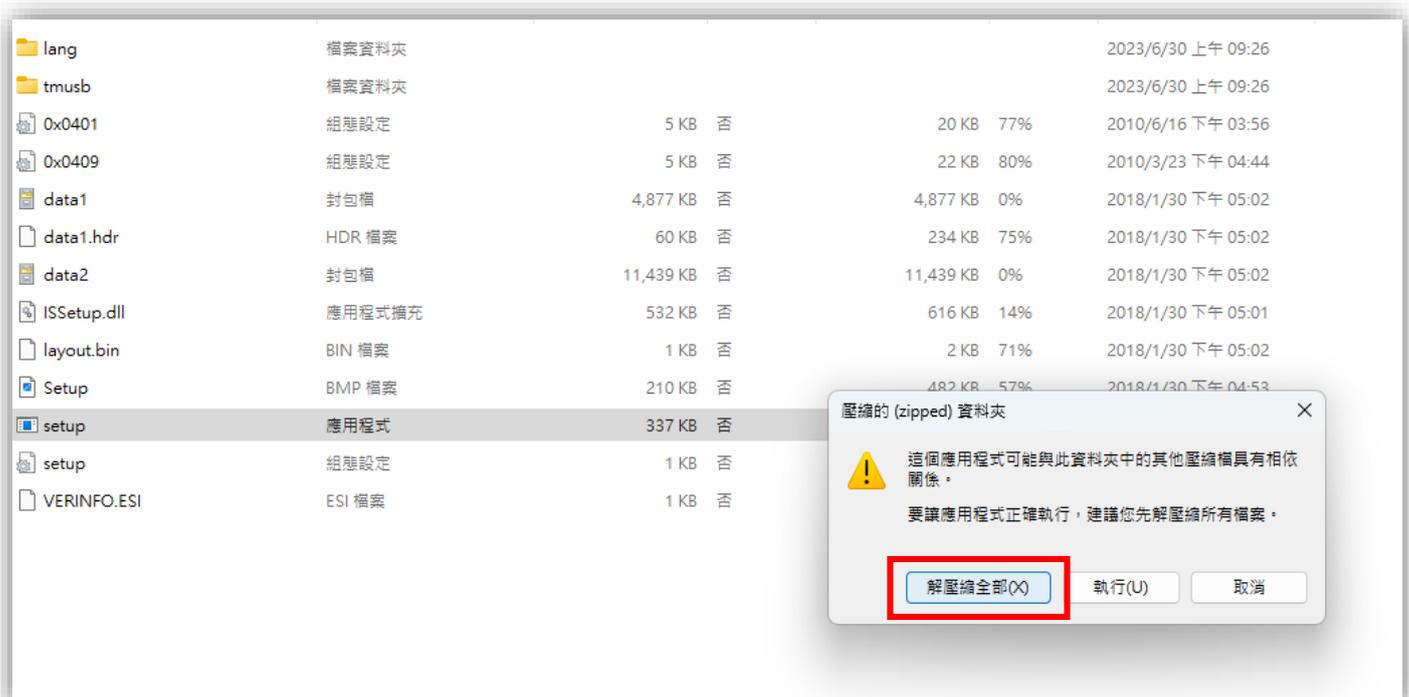


★步驟 5. 點選解壓縮

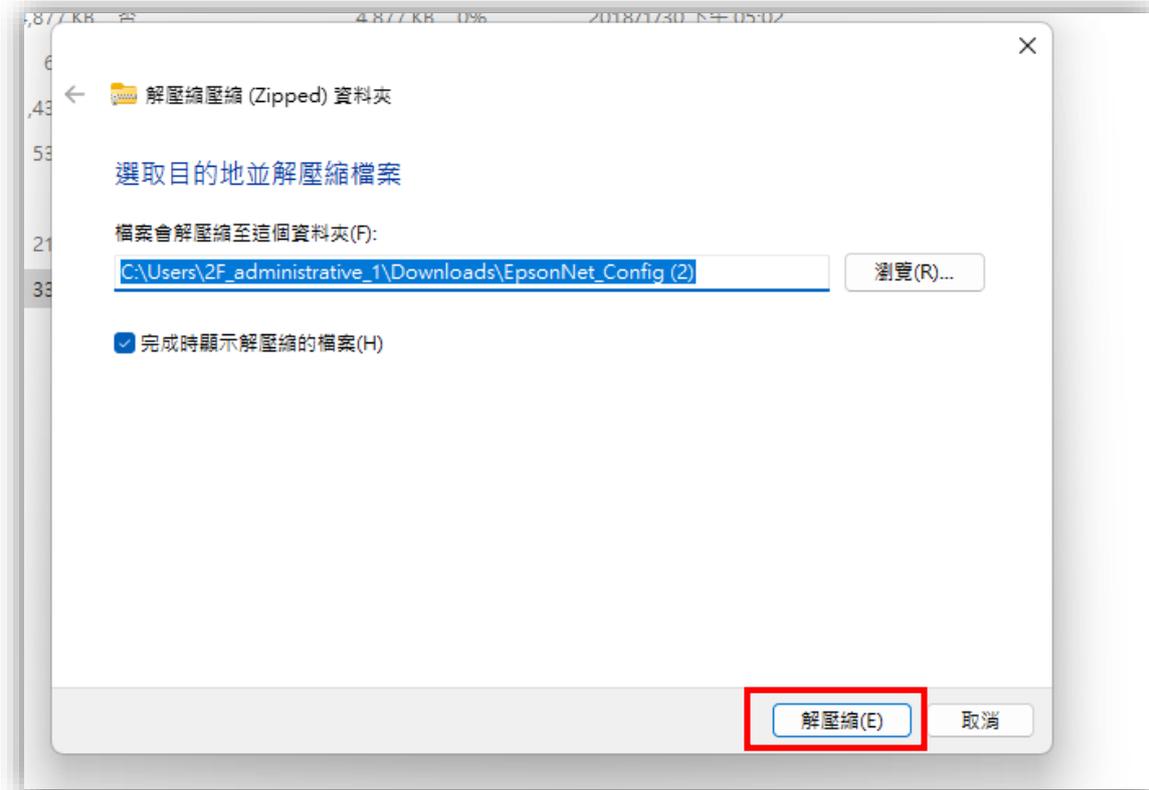


EpsonNet Config 軟體安裝


★步驟 1. 點選 EpsonNet Config

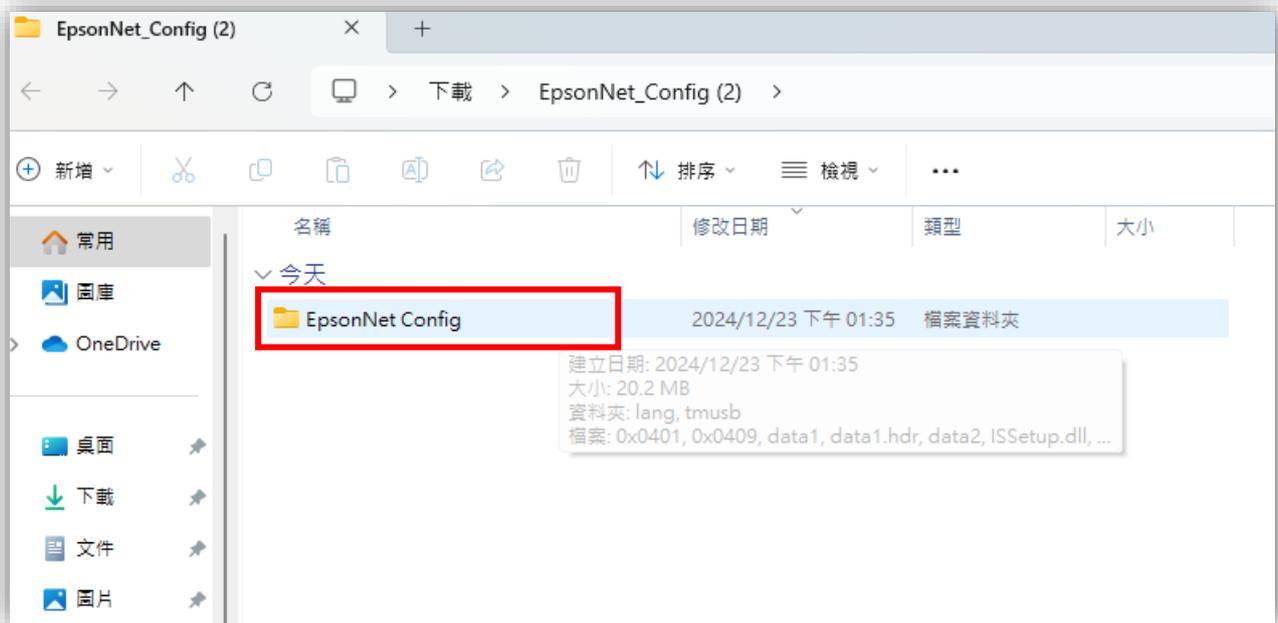


★步驟 2. 點選 setup


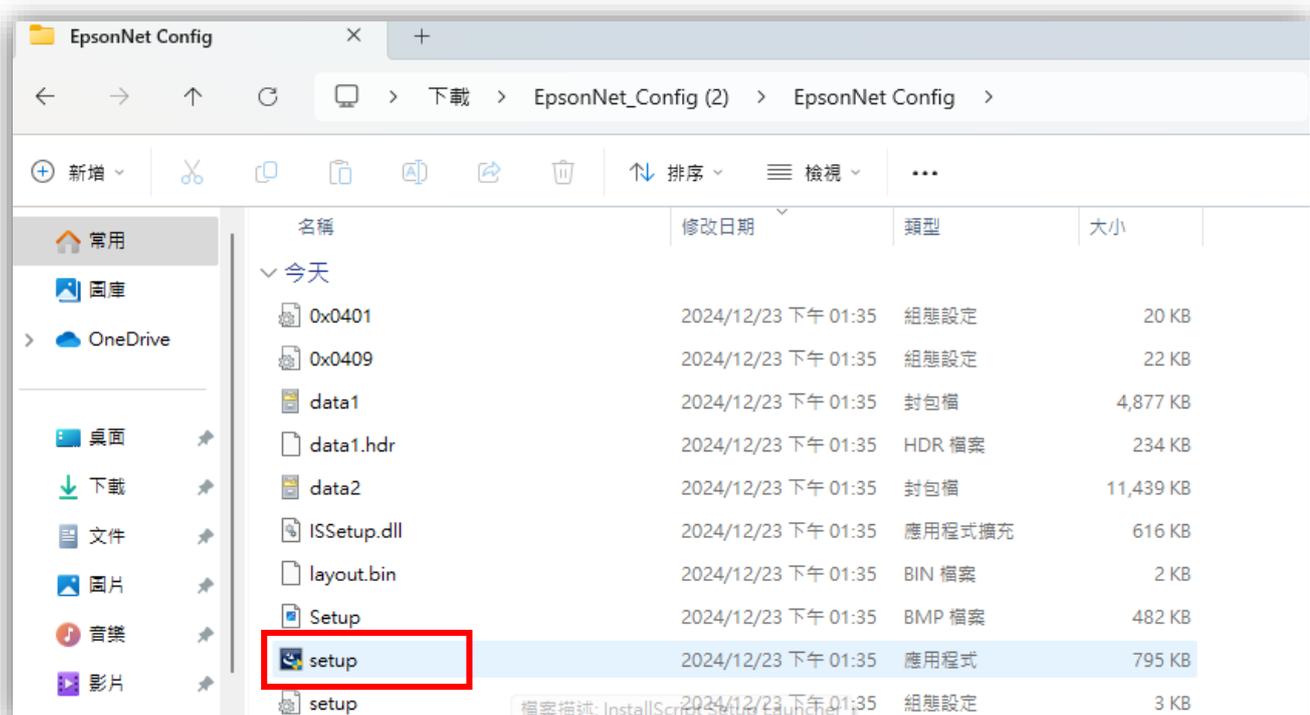


★步驟 3. 選擇語言

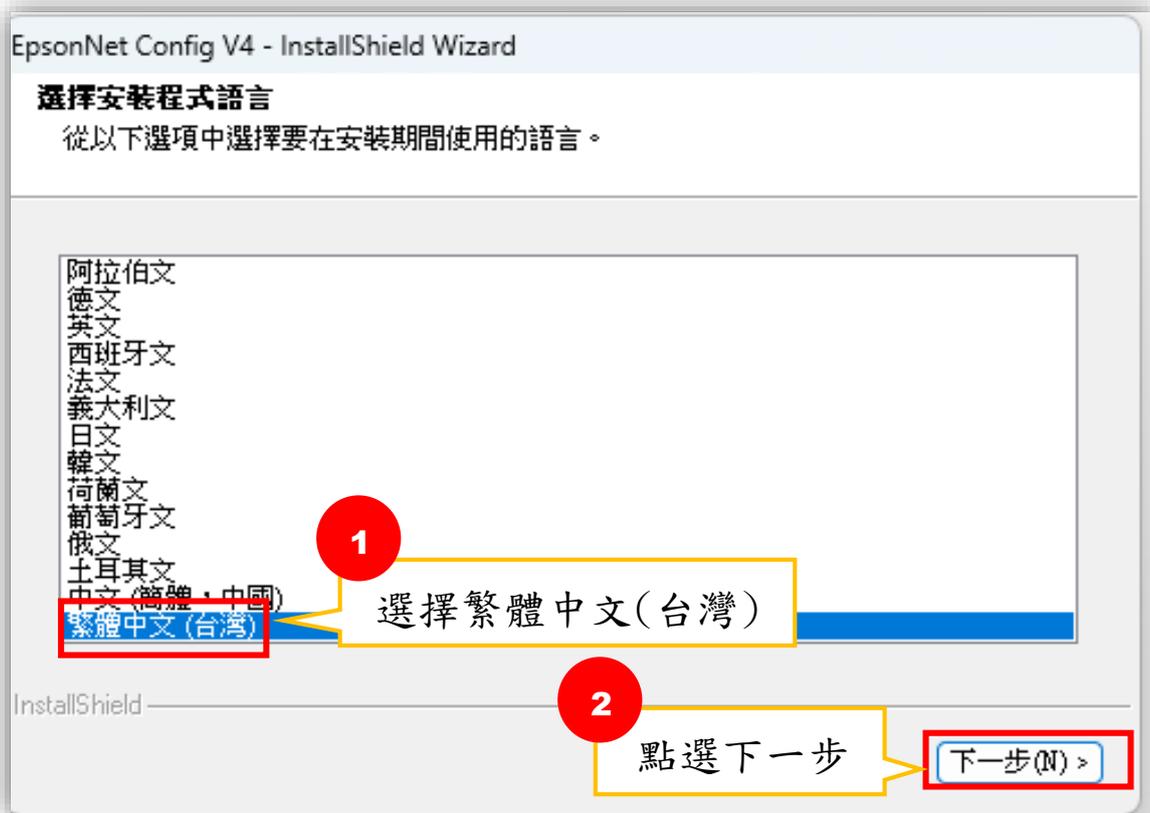

★步驟 4. 依序進行安裝

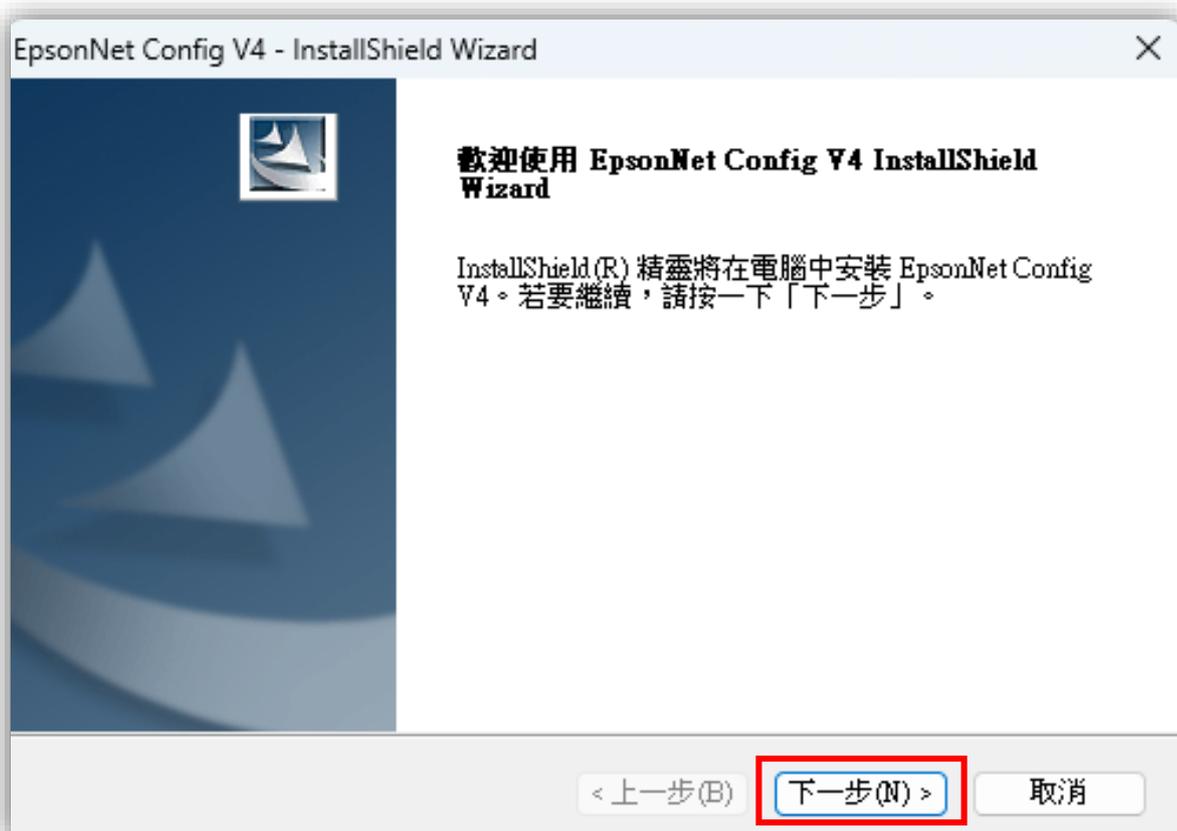

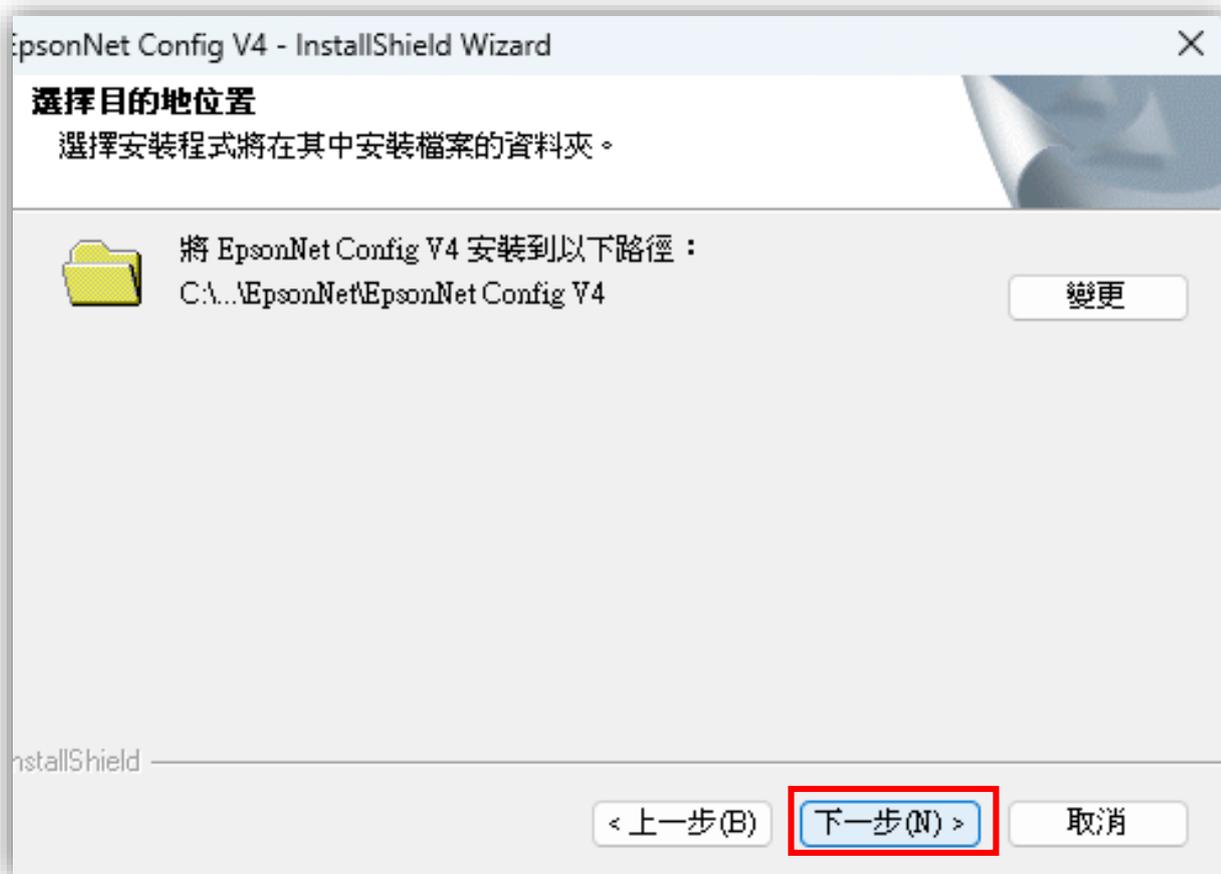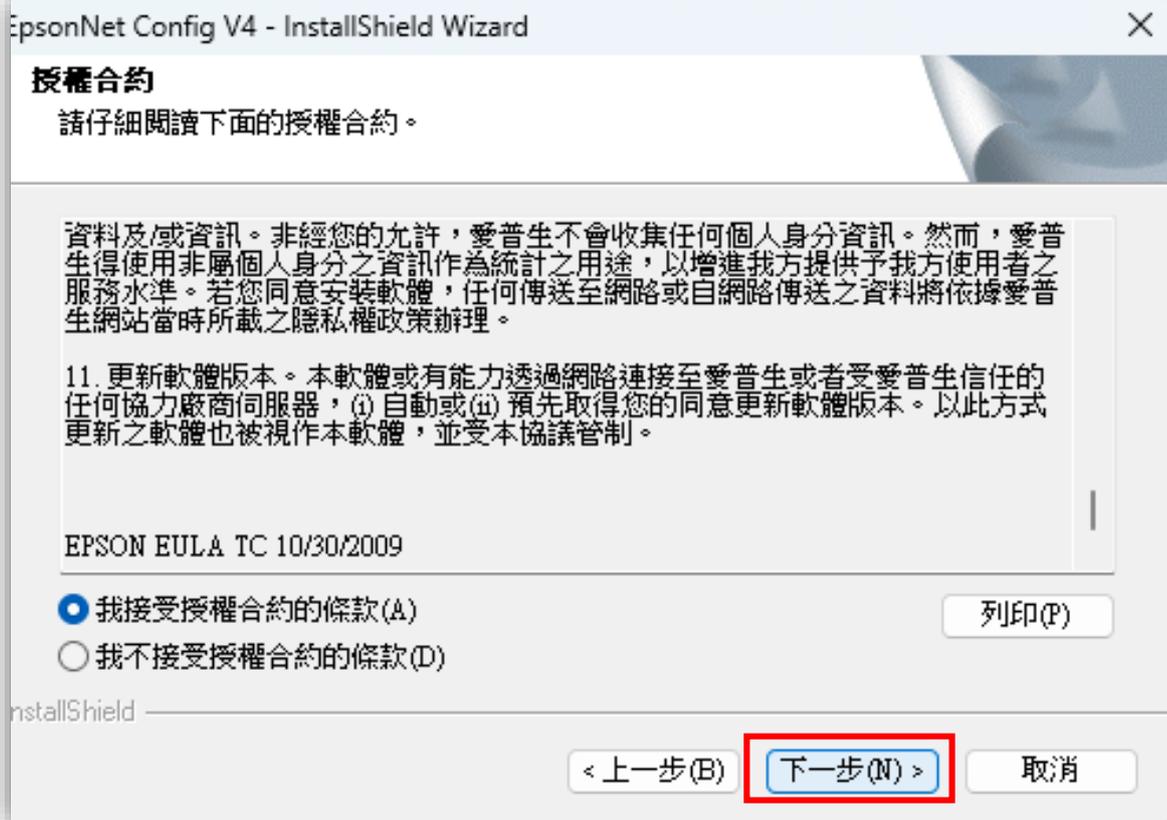

EpsonNet Config V4 - InstallShield Wizard



可以安裝該程式了

精靈已就緒，可以開始安裝了。

按一下「安裝」以開始安裝。

目前設定：

目標目錄：

C:\Program Files (x86)\EpsonNet\EpsonNet Config V4

程式資料夾：

EpsonNet

InstallShield

< 上一步(B)

安裝

取消

EpsonNet Config V4 - InstallShield Wizard



InstallShield Wizard 完成

InstallShield Wizard 已成功安裝了 EpsonNet Config V4。按一下「完成」以結束精靈。


< 上一步(B)

完成

取消

EpsonNet Config 密碼設定


★步驟 1. 到【開始】搜尋 EpsonNet Config

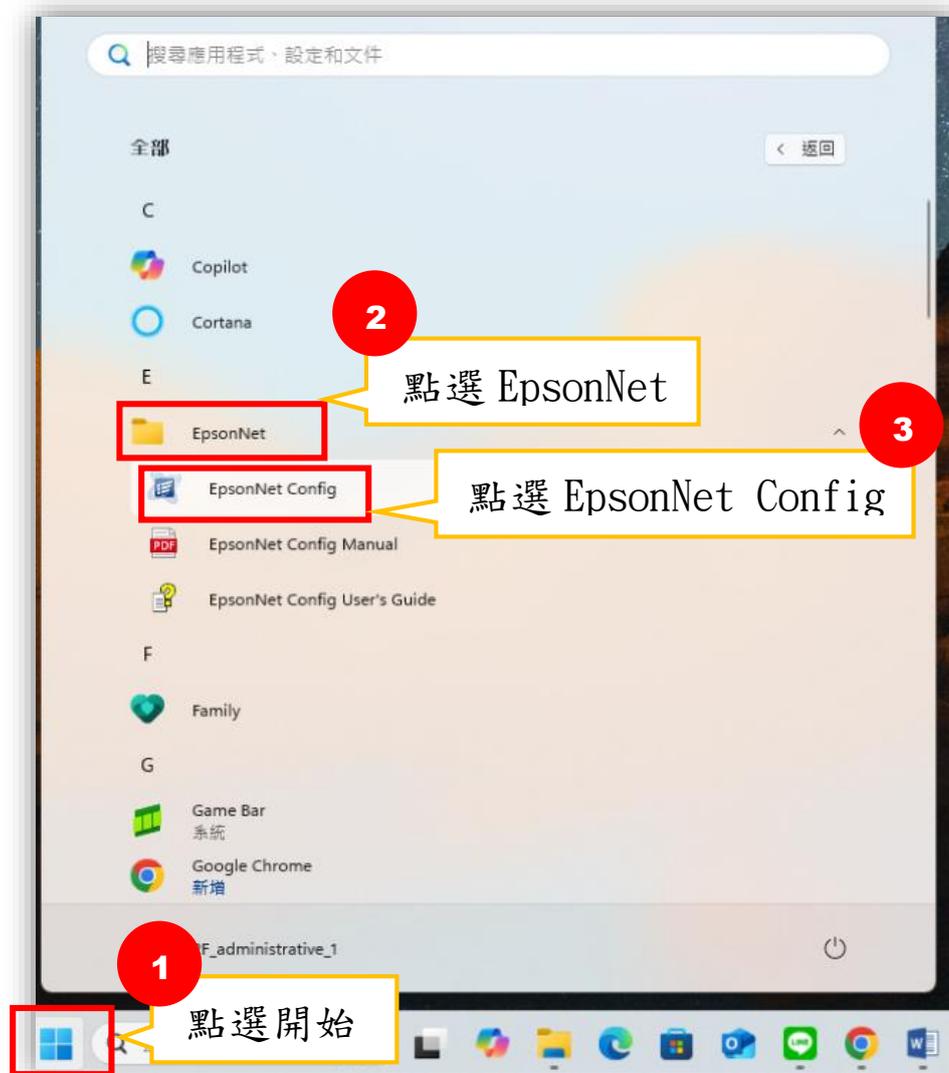

★步驟 2. 重新整理



★步驟 3. 進行密碼設定

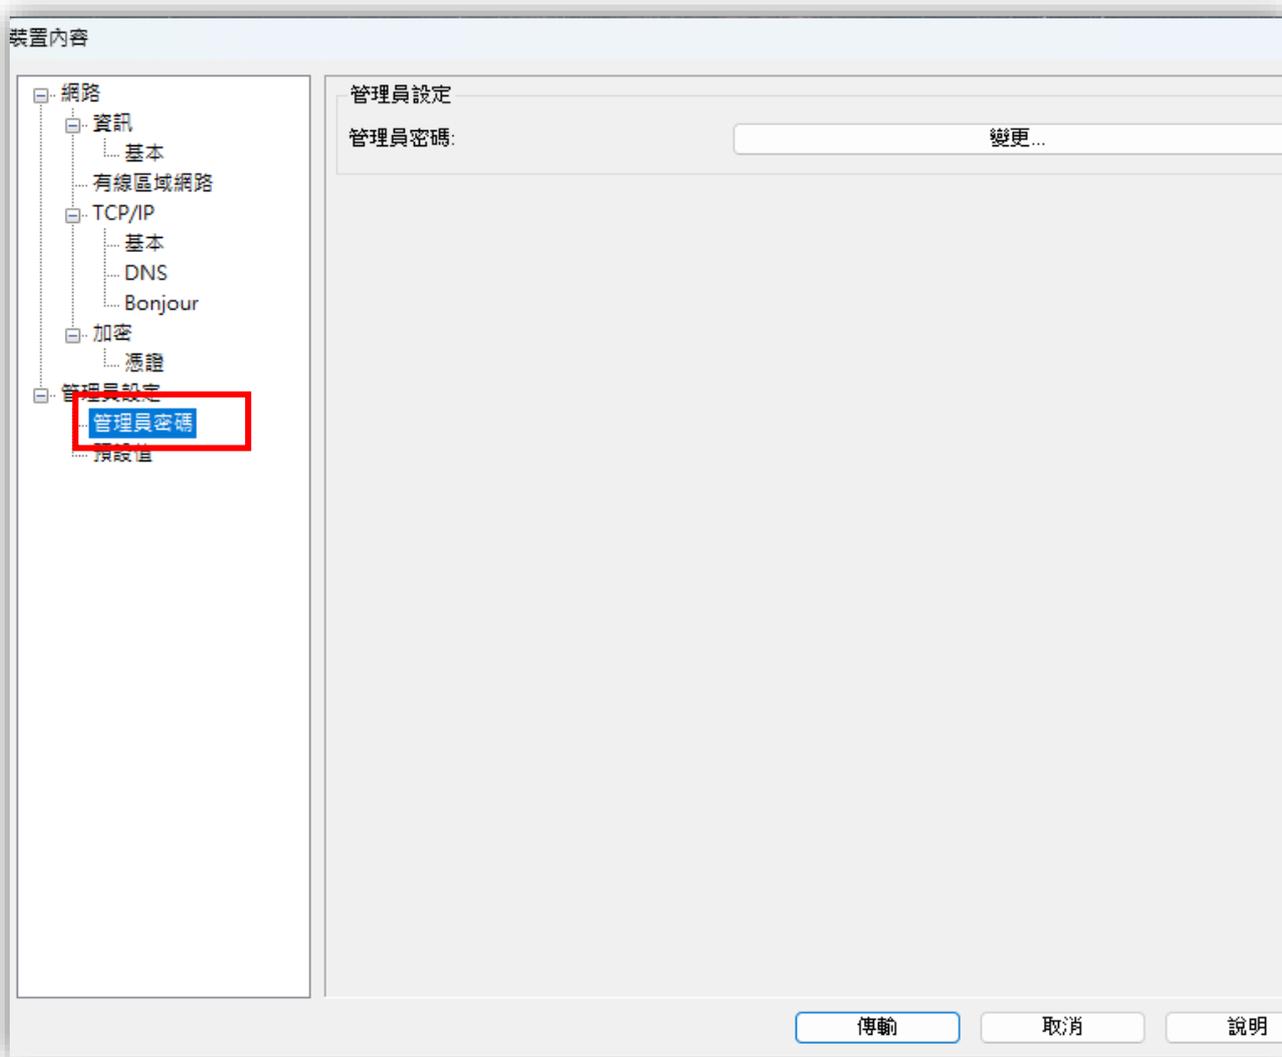

- 網路
 - 資訊
 - 基本
 - 有線區域網路
 - TCP/IP
 - 加密
 - 憑證
- 管理員設定
 - 管理員密碼
 - 預設值

管理員設定

管理員密碼:

管理員密碼

管理員密碼

1 自行設定密碼

新密碼: ●●●●●●

重新輸入新密碼: ●●●●●●

注意:
按下 [確定] 鍵後，新密碼不會立即生效。
新密碼會在傳輸設定後生效。

2 點選確定

確定

3 點選傳輸

傳輸

取消


說明


Epson 印表機 IP 位址更改

★步驟 1. 點選設備



★步驟 2. 將前三個數字改成和電腦 IP 相同的數字

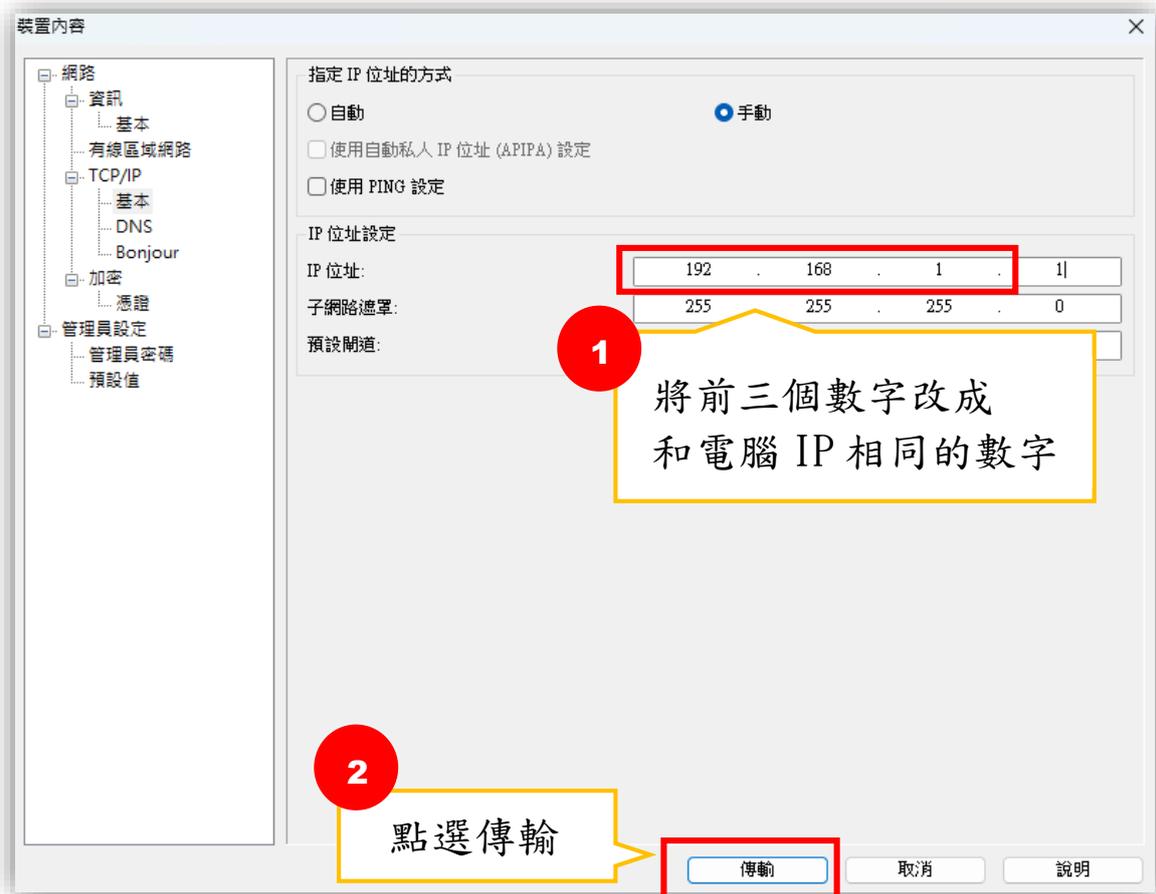

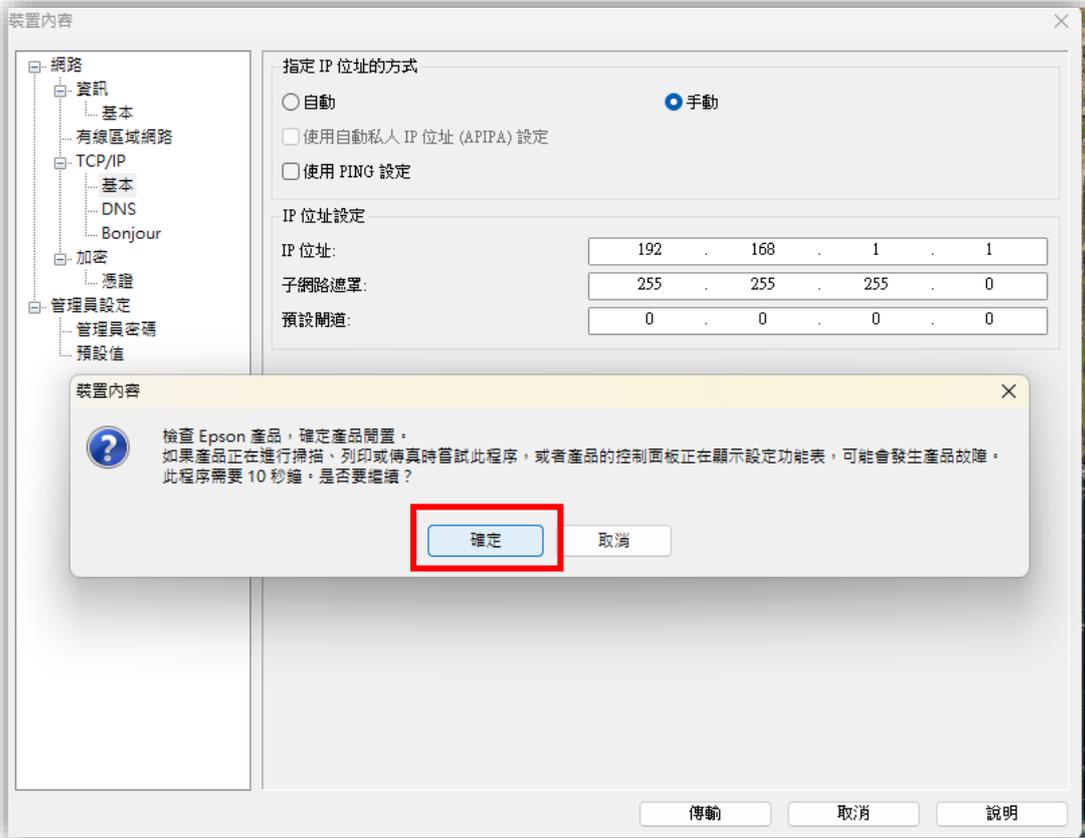

電腦 IP 位址查詢

★步驟 1. 至電腦設定→網際網路




★步驟 2. 查看 IPv4 位址



Epson 印表機連線設定

★步驟 1. 在瀏覽器中搜尋設定好的 IP 位址並進入頁面

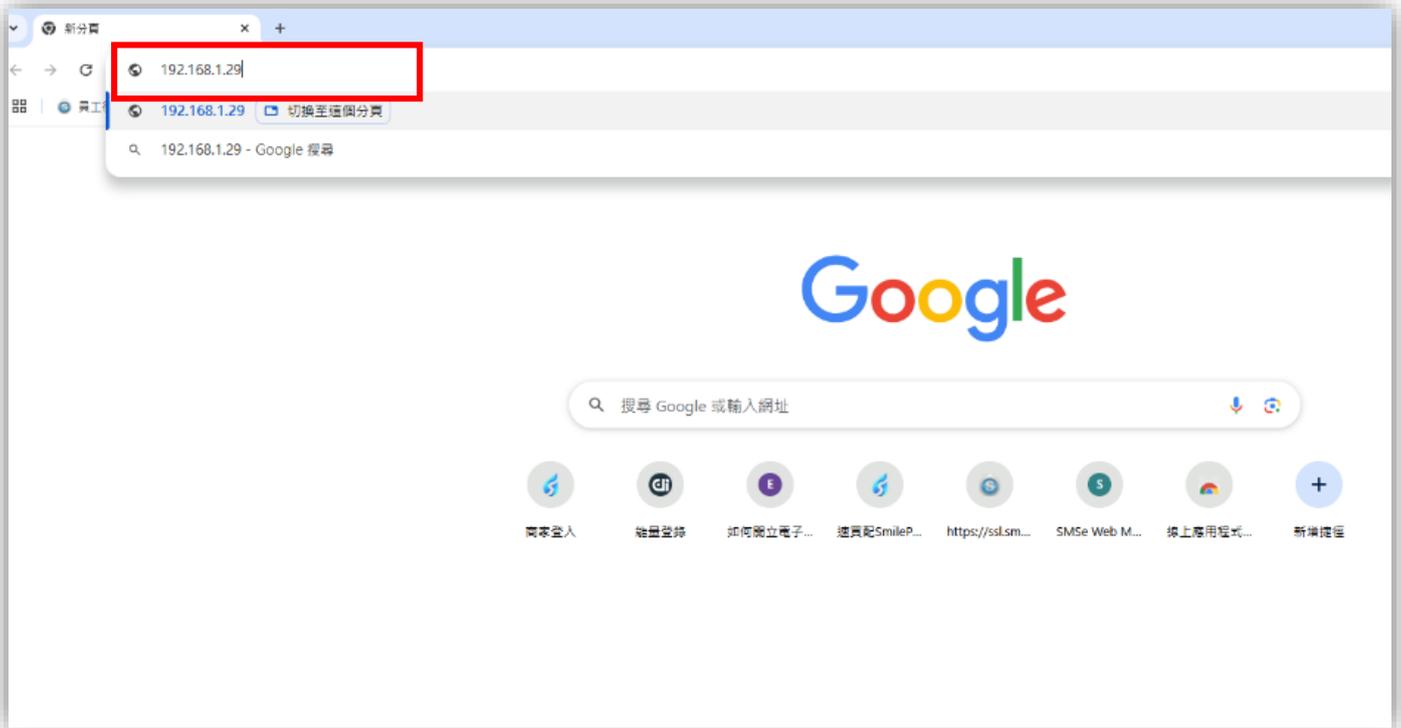


★步驟 2. 依序進入網頁





★步驟 3. 輸入使用者名稱與密碼

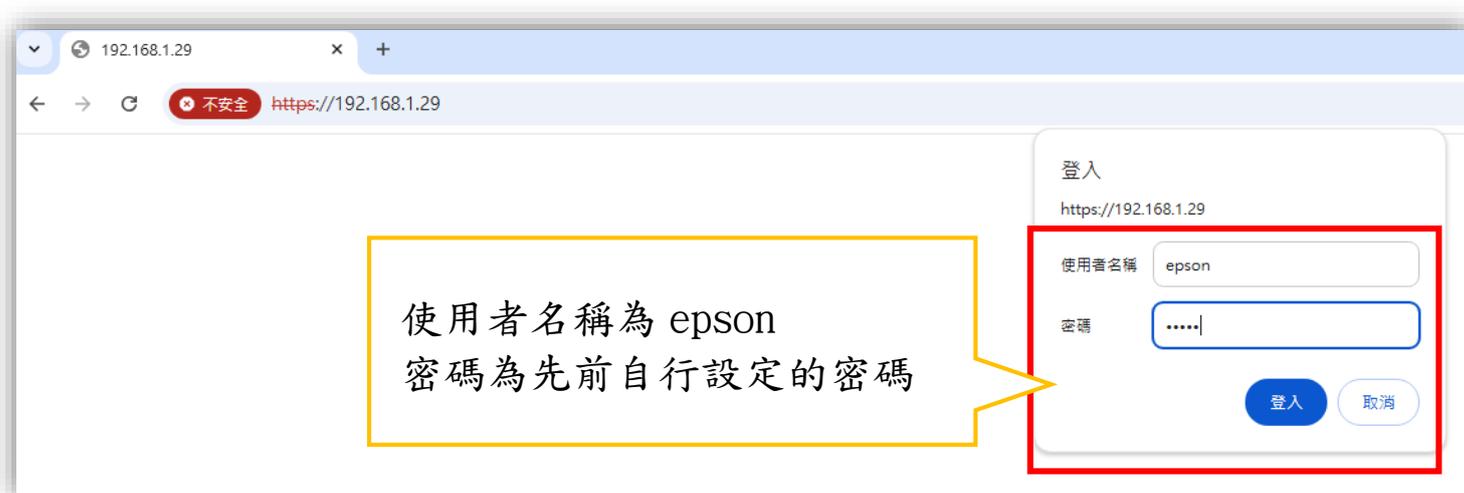

★步驟 4. 進入頁面後依序設定

EpsonNet Config

Home Help About

Information

Network

- Basic Information
- TCP/IP
- SNMP
- Bonjour
- Time Setting
- Timeout
- ePOS-Print

Configuration

Network

- Ethernet
- Wireless
- Security
- SSL/TLS
- Authentication
 - Certificate List**
 - Certificate Import
- TCP/IP
- SNMP
- Bonjour
- Time Setting
- Timeout
- ePOS-Print
- Advanced Settings

Optional

- Administrator Information
- Reset
- Password

Information - Network

Basic Information

Administrator Name	
Location	
Interface Card Model Name	UB-E04
MAC Address	38:1A:52:D4:B5:57
Hardware Version	04.00
Software Version	01.25
Model Name	TM-T70II
	Online

Refresh

Configuration - Network Open Details

Authentication - Certificate List

Self-Signed Certificate	
Status	Used
Subject	0.0.0.0
	Create
CA-Signed Certificate1	
Status	No Certificate
Subject	
	Delete
CA-Signed Certificate2	
Status	No Certificate
Subject	
	Delete
CA-Signed Certificate3	
Status	No Certificate
Subject	
	Delete
CA Certificate1	
Status	No Certificate
Type of Certificate	
Subject	
	Delete
CA Certificate2	
Status	No Certificate

EpsonNet Config

Home Help About

Information

Network

Basic Information
TCP/IP
SNMP
Bonjour
Time Setting
Timeout
ePOS-Print

Configuration

Network

Ethernet
Wireless
Security
SSL/TLS
Authentication
Certificate List
Certificate Import
TCP/IP
SNMP
Bonjour
Time Setting
Timeout
ePOS-Print
Advanced Settings

Optional

Administrator Information
Reset
Password

Configuration - Network
Authentication - Create Self-Signed Certificate

Create Selfsigned Certificate	
Key Size	2048bit
Common Name	0.0.0.0
Organization	SEIKO EPSON CORP.
Validity Before	2024 - 12 - 23
Validity Period (1 to 10 years)	1 year

Create

EpsonNet Config

Home Help About

Configurations sent.

To enable the configurations you sent, click the "Reset" button or turn the printer off and then back on.

Reset

EpsonNet Config Rev.1.2

Home Help About

重新載入畫面



你的連線不是私人連線

攻擊者可能會嘗試從 **192.168.1.29** 竊取你的資訊 (例如密碼、郵件或信用卡資訊)。 [進一步瞭解這項警告](#)

NET::ERR_CERT_AUTHORITY_INVALID

 [開啟強化防護](#)，即可享有 Chrome 最強大的安全防護機制

進階

點選進階

返回安全網頁



你的連線不是私人連線

攻擊者可能會嘗試從 **192.168.1.29** 竊取你的資訊 (例如密碼、郵件或信用卡資訊)。 [進一步瞭解這項警告](#)

NET::ERR_CERT_AUTHORITY_INVALID

 [開啟強化防護](#)，即可享有 Chrome 最強大的安全防護機制

隱藏詳細資料

返回安全網頁

伺服器無法證明其屬於 **192.168.1.29** 網域；其安全性憑證未取得你電腦作業系統的信任。這可能是因為設定錯誤，或有攻擊者攔截你的連線所致。

繼續前往 192.168.1.29 網站 (不安全)

點選繼續前往

EpsonNet Config

Home Help About

Information
Network

- Basic Information
- TCP/IP
- SNMP
- Bonjour
- Time Setting
- Timeout
- ePOS-Print

Configuration
Network

- Ethernet
- Wireless
- Security**
- Authentication
- Certificate List
- Certificate Import
- TCP/IP
- SNMP
- Bonjour
- Time Setting
- Timeout
- ePOS-Print
- Advanced Settings

Optional

- Administrator Information
- Reset
- Password

Configuration - Network
Security-SSL/TLS

SSL/TLS

Server Certificate: Selfsigned Certificate

Encryption Strength: Medium

Automatic Redirect HTTP to HTTPS: Enable

1 點選 SSL/TLS

2 點選 Send

Send

Configuration - Network
Authentication - Certificate List

Self-Signed Certificate	
Status	Used
Subject	0.0.0.0

CA-Signed Certificate1	
Status	No Certificate
Subject	

CA-Signed Certificate2	
Status	No Certificate
Subject	

EpsonNet Config

Home Help About

Configurations sent.

To enable the configurations you sent, click the "Reset" button or turn the printer off and then back on.

Reset

EpsonNet Config

Home Help About

Configuration update complete.

Go Home

EpsonNet Config

Home Help About

Information

Network

Basic Information
TCP/IP
SNMP
Bonjour
Time Setting
Timeout
ePOS-Print

Configuration

Network

Ethernet
Wireless
Security
SSL/TLS
Authentication
Certificate List
Certificate Import

Configuration - Network

ePOS-Print

5.0

Disable

Enable

Disable

180(ppi)

Page 0-5 16-9

Send

1 點選 ePOS-Print

2 點選 Enable

3 點選 Send

EpsonNet Config

Home Help About

Configurations sent.

To enable the configurations you sent, click the "Reset" button or turn the printer off and then back on.

Reset

EpsonNet Config

Home Help About

EPSON

Configuration update complete.

Go Home

不休眠模式設定

★步驟 1. 依序點選設定

The screenshot shows the EpsonNet Config web interface. The left sidebar has a menu with 'Advanced Settings' highlighted. The main content area is titled 'Configuration - Network' and 'Advanced Settings'. It contains three sections: 'Ethernet Port Type Setting' with a dropdown set to 'Auto', 'Energy Efficient Ethernet' with a dropdown set to 'Disable', and 'Standby' with a dropdown set to 'Disable'. A 'Send' button is at the bottom right. A 'Note' states: 'If Energy Efficient Ethernet or Standby is set to Disable, power consumption increases when not printing.'

- 點選 Advanced Settings
- 更改為 Disable
- 更改為 Disable
- 點選 Send

The screenshot shows the 'Configurations sent.' confirmation screen. It includes the text: 'To enable the configurations you sent, click the "Reset" button or turn the printer off and then back on.' A 'Reset' button is centered at the bottom.

Configurations sent.

To enable the configurations you sent, click the "Reset" button or turn the printer off and then back on.

Reset

印表機連線確認

★步驟 1. 依序操作，若列表機圖示旁顯示綠勾勾  表示連線成功



1 更改為設定好的 IP

2 兩個選項都勾選

3 點選儲存

4 測試列印

試用帳戶

印表機設定

- 啟用快速列印功能
- 啟用自動測試連線功能

列表機IP: **192.168.1.29**

目前僅支援epson TM m10(網路版)、TM m10

營業人識別標章

訊航科技

如僅需使用文字作為營業人識別標章，此部分不做設定。
若已經上傳檔案，要改為文字檔，此部分請先刪除，謝謝!

拖放PNG檔案，即可上傳（建議尺寸 400 x 100）

選擇檔案 未選擇任何檔案

Oops!
沒有找到您上傳的檔案

清空 統編 載具 捐贈 取消

發票 列印

列印明細 